


- MAIN and SEC Black Burst inputs
- Synch., Burst and Noise control
- Switching in the frame interval
- Output alarm contact
- Automatic restore on return to normal conditions

- Ingressi di Black Burst MAIN e SEC
- Controllo di Synch., Burst e Noise
- Commutazione su intervallo di quadro
- Contatto di allarme in uscita
- Ripristino automatico al ritorno della normalità

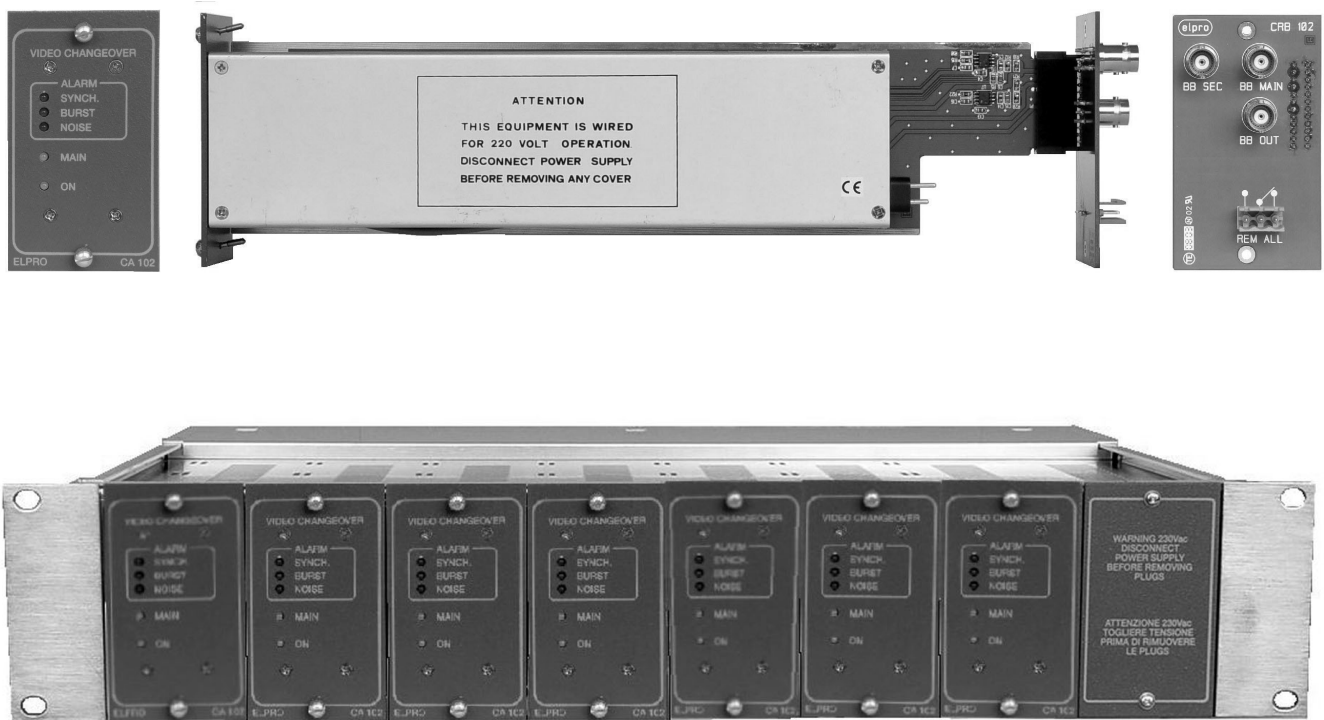

SPECIFICATIONS

Inputs type	:DC coupled, 75 Ω (Incoming signal must be clamped at 0V)
Input ret. Loss	:-32 dB at 5 MHz
Output	:75 Ω , source terminated
Output ret. Loss	:-37 dB at 5 MHz
Presence control	:both synchronisms
Threshold	:Burst 300 mV $\pm$ 25 mV Black level 0V $\pm$ 10 mV
Type of switching	:static, on vertical interval
Alarm	:dry contact, C, NO, NC
Main input	:230 Vac 50 Hz
Power consumption	:5 VA
Weight	:0.3 Kg
Operating temp.range	:0÷45°C
Safety	:according to EN60065
EMC	:according to EN55103-1 and EN55103-2

ELPRO Video Labs s.r.l.

Strada della Pronda, 45/B
10142 Torino-ITALY
Tel.+39 0117701583 – Fax +39 011703751

E-mail: info@elprovideolabs.com
[http:// www.elprovideolabs.com](http://www.elprovideolabs.com)

