

# SL150IIBi Bi-Color LED Video Light

To meet different needs of users, especially for the needs of Bi-Color capabilities, Godox is now introducing a Bi-Color LED video light SL150IIBi. It has got all the excellent quality and performance of SL150II series lights with the added flexibility of expansive color temperature range, bringing users a more creative and flexible experience. It is an ideal companion for online streaming, broadcasting, and other video applications.



Dimming from  
100%~0%

96

CRI

97

TLCI



2800K~6500K

## Variable Color Temperature for Flexible Creativity

Color temperature range from 2800K to 6500K enables users to quickly match the color of existing lighting without worrying about the gels, providing users with more options for creative applications.



## Silent Mode

Turn off the Fan for Sound-sensitive Environments



## Built-in 9 FX Effects

Providing You More Creative Possibilities

| Display | FX1    | FX2    | FX3    | FX4    | FX5 | FX6         | FX7    | FX8  | FX9      |
|---------|--------|--------|--------|--------|-----|-------------|--------|------|----------|
| Scene   | Flash1 | Flash2 | Storm1 | Storm2 | TV  | Broken bulb | Candle | Fire | Firework |



## Easy Wireless Control

Selectable 32 Channels in 16 Groups with the RC-A6 Remote




## Bowens Mount

Compatible with a Wide Range of Accessories



## What's in the Box

|                    |     |            |     |                    |     |
|--------------------|-----|------------|-----|--------------------|-----|
| SL150IIBi          | x 1 | Power Cord | x 1 | Standard Reflector | x 1 |
| Frosted Cover      | x 1 | Lamp Cover | x 1 | RC-A6 Remote       | x 1 |
| Instruction Manual | x 1 |            |     |                    |     |

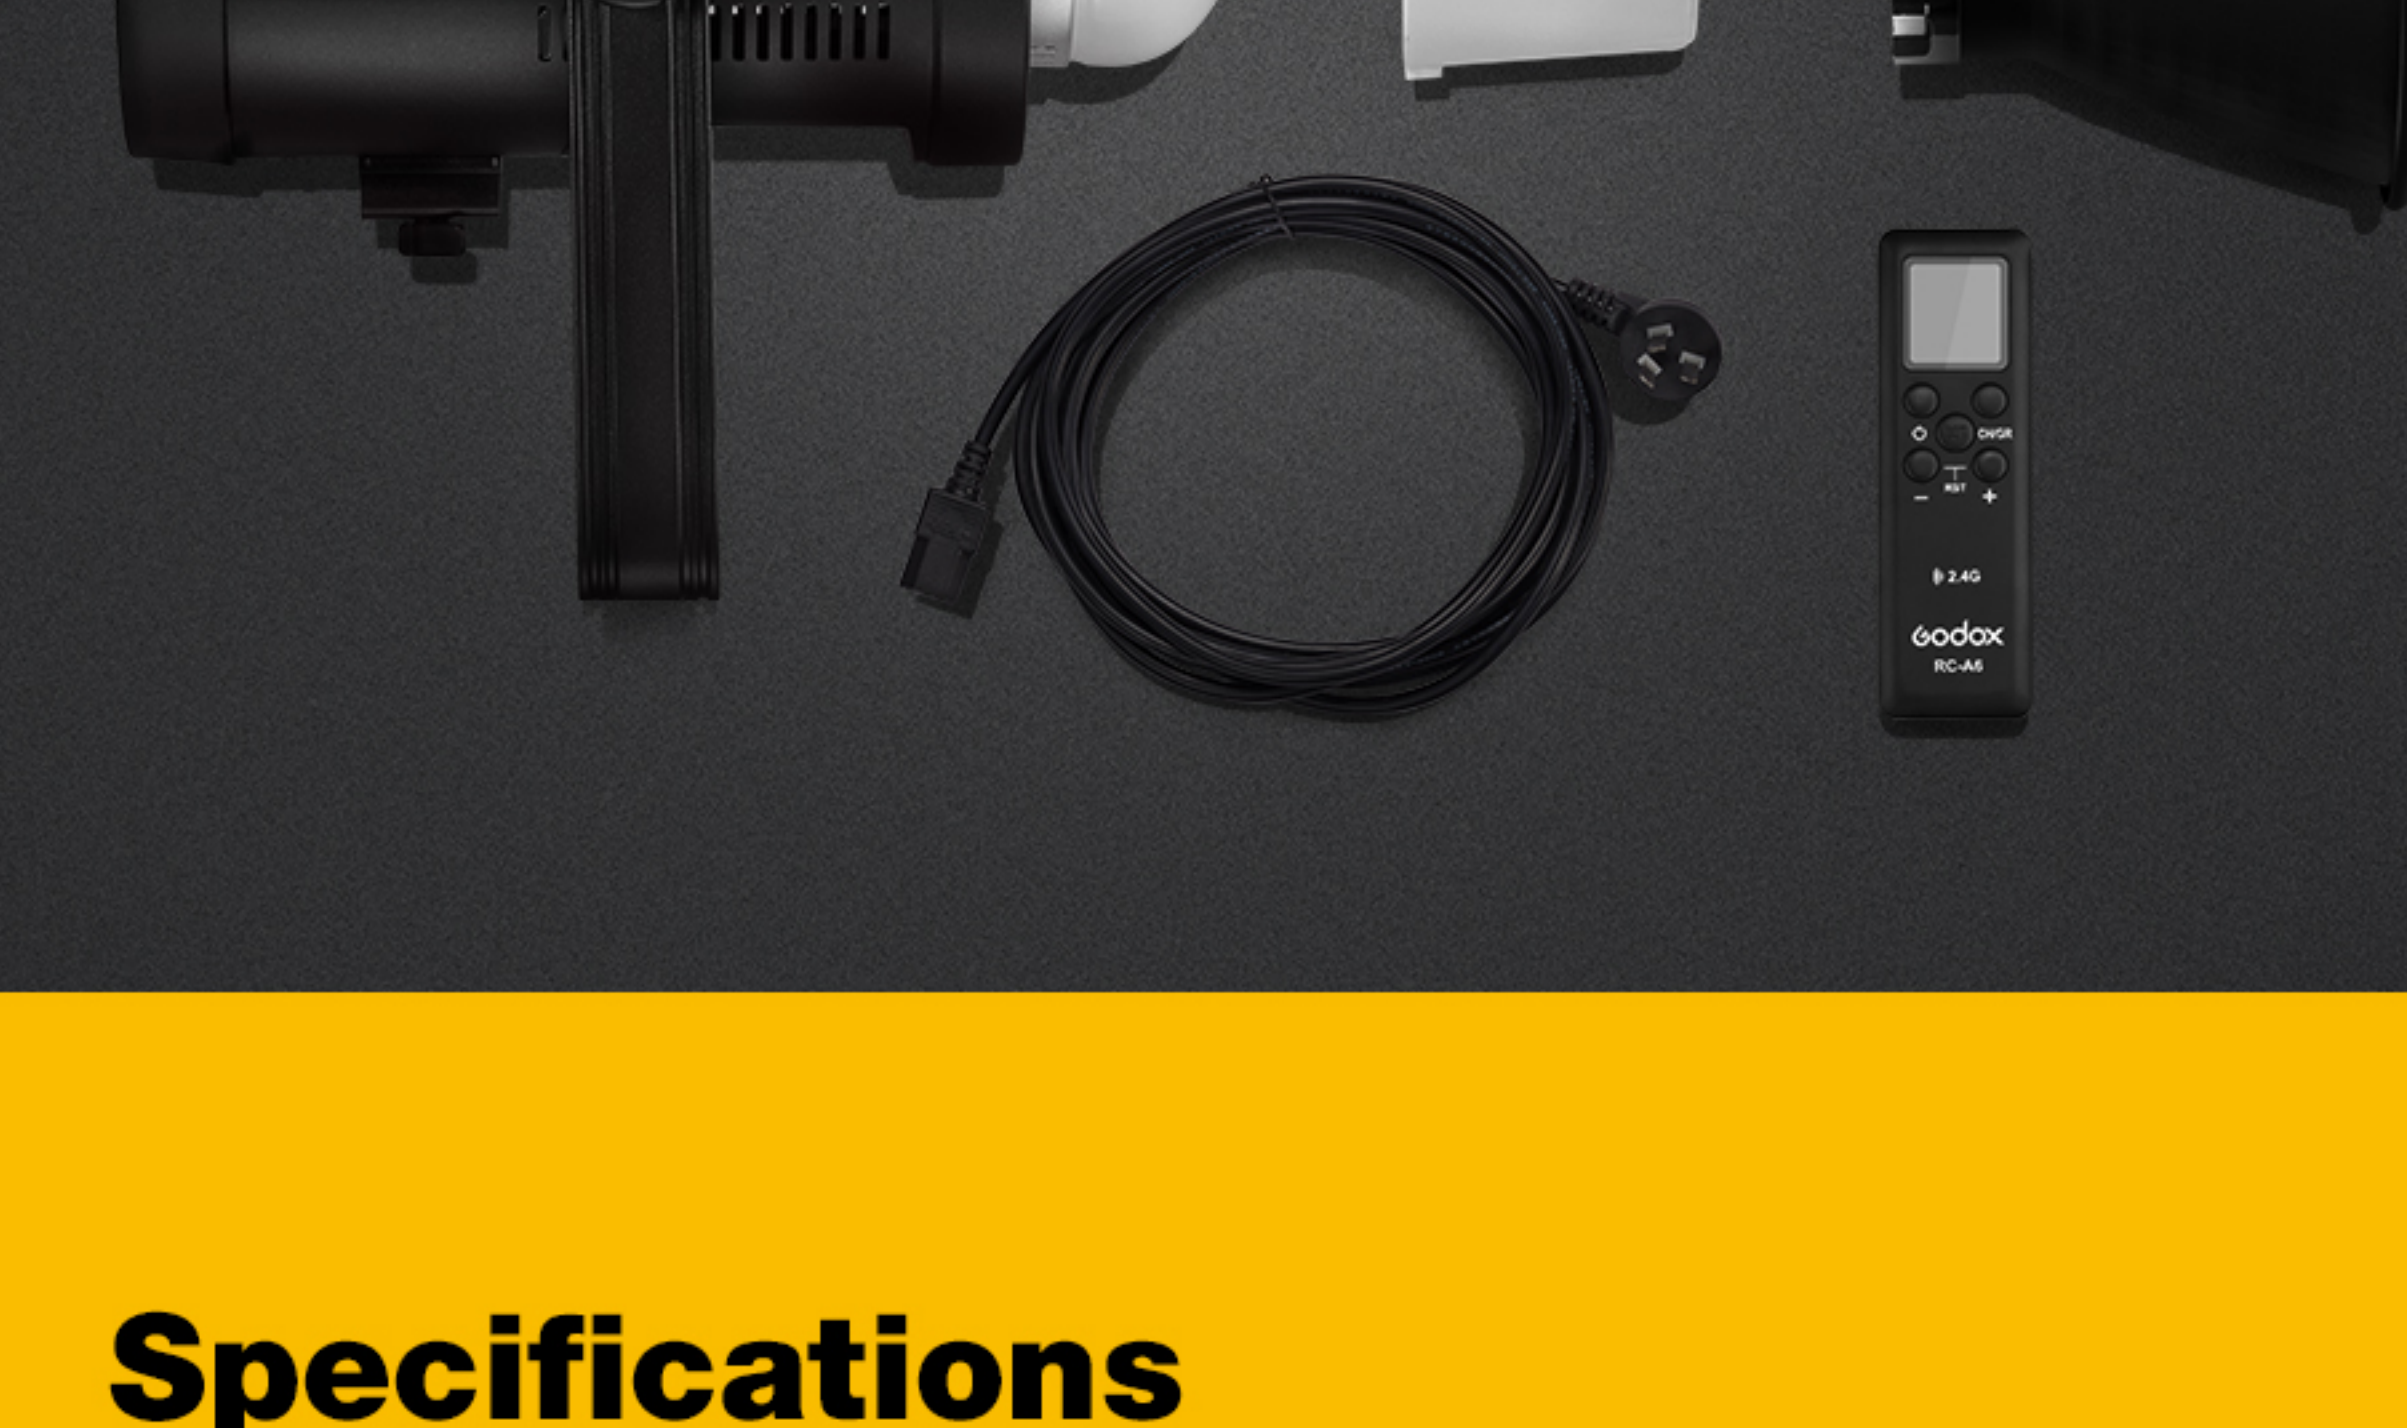

## Specifications

|                                          |                         |
|------------------------------------------|-------------------------|
| LED Video Light                          | SL150IIBi               |
| Power Supply                             | AC100V - 240V (50/60HZ) |
| Output Power                             | 150W                    |
| Color Temperature Range                  | 2800K ~ 6500K           |
| 100% brightness (LUX @1m)                | ≈30000                  |
| CRI                                      | ≈96                     |
| TLCI                                     | ≈97                     |
| Brightness Adjustment                    | 0% ~ 100%               |
| Operation Temperature                    | -10°C ~ 40°C            |
| Channel                                  | 32                      |
| Group                                    | 16 (A,B,C,D,E,F,0~9)    |
| Size(without reflector)                  | 34*20*16cm              |
| Weight(without reflector and lamp cover) | 3.07Kg                  |

|                       |                             |
|-----------------------|-----------------------------|
| Remote Control        | RC-A6                       |
| Power Supply          | 3.0V (AAA*2) (Not included) |
| Wireless Frequency    | 2.4GHZ                      |
| Distance (emptiness)  | 50m                         |
| Channel               | 32                          |
| Group                 | 16 (A,B,C,D,E,F,0~9)        |
| Standby time          | Over one year               |
| Operation temperature | -10°C ~ 40°C                |
| Dimension             | 120*38*15mm                 |
| Net Weight            | 30g                         |