

Panasonic

P R E L I M I N A R Y

PT-RZ670 Series

1-Chip DLP™ Projectors

PT-RZ670
PT-RZ670L
PT-RW630
PT-RW630L




**World's First* Laser Light Source 1-Chip DLP™
Projectors with 6,500 lm of Brightness**

* For 1-chip DLP™ projectors, as of July 2014.



An Answer to the Critical Demands for Long-Term Operation

The PT-RZ670 Series of peak-performing 1-chip DLP™ projectors were developed with the goal of achieving the highest possible image level as flagship models. Joining the ranks of Panasonic's SOLID SHINE projectors, this new series offers the world's first*¹ 6,500 lm of brightness in a laser light source 1-chip DLP™ projector. The new optical system reproduces colors with an excellence that approaches those of high-end flagship models. Plus, the unprecedented reliability of the solid-state light source maintains image quality for



20,000 hours*² or more. Installation flexibility has also entered a new dimension with the PT-RZ670 Series. In addition, Starting with the professional features in our flagship models for large-venue applications, a host of functions reflect the technology and know-how that Panasonic has accumulated over more than 30 years of projector development. The PT-RZ670 Series is setting new 21st century standards for reliable, high-quality projectors that easily meet the demands of critical professionals.

	PT-RZ670B	PT-RW630B		PT-RZ670W	PT-RW630W
	PT-RZ670LB	PT-RW630LB		PT-RZ670LW	PT-RW630LW
	WUXGA	WXGA		WUXGA	WXGA
	6,500 lm	6,500 lm		6,500 lm	6,500 lm

The PT-RZ670LB/RZ670LW and PT-RW630LB/RW630LW are not equipped with a lens.
The cabinet for each model is available in black (PT-RZ670B/RW630B) or white (PT-RZ670W/RW630W).

Superb Image Quality

High Brightness of 6,500 lm

A new heat-resistant material is used in the phosphor wheel to withstand the high output of the laser light source. Combined with a drive system that is also optimized for the light source, this made it possible to achieve the world's first*¹ 6,500 lm of brightness in a 1-chip DLP™ projector. Actually, the result of Panasonic efforts to optimize color reproduction enabled a perceived brightness that even exceeds the specification values, thus opening the door to a wide range of applications for the PT-RZ670 and PT-RW630.



A material with excellent heat resistance is used in the phosphor wheel. This achieves both high brightness and long-lasting reliability.

Dynamic Light Control for High 10,000:1*³ Contrast Ratio

The PT-RZ670 Series projectors directly control the output of the laser light source itself, enabling faster response than lamp-based projectors. Frame-by-frame scene-linking modulation with complete digital control makes it possible to adjust the light output with higher precision. This gives the PT-RZ670 Series its remarkable 10,000:1*³ contrast without lowering brightness. This enables highly precise contrast control even when bright and dark scenes suddenly or frequently interchange. There is also almost no reduction in contrast when the projector is used for extended periods of time.

Detail Clarity Processor 3 Gives Natural Clarity to Even the Finest Details

This unique Panasonic circuit optimizes the sharpness of each image, based on the super-high-, high-, medium-, and low frequency components of the extracted image information. The resulting images have more natural, lifelike expression.



Conventional sharpness control



Detail Clarity Processor 3

Advanced Technologies for Excellent Image Quality

- 3D color management system
- Full 10-bit image processing
- Progressive cinema scan (3:2 pulldown)
- Dynamic sharpness control
- Digital noise reduction
- IP conversion
- AI scene control
- 2:2 pulldown mode
- sRGB compatibility

Superb Durability

Dual Drive Laser Optical Engine for Reliable 24/7 Operation

It is almost impossible to imagine that a laser light source would suddenly go blank. The PT-RZ670 Series uses two sets of light sources that group laser diodes into a number of modules. Based on redundant design, the laser diodes are put to considerable use, so over the long term, if a laser diode were to stop functioning, a protective circuit would activate to keep the brightness drop extremely small. Even if this were to happen during 24/7 operation, it would not result in downtime. The dual drive structure also keeps the optical engine output uniformly bright and colorful even if the light source's original brightness is different due to aging degradation.



Long-Lasting Image Quality Featuring Constant Brightness Modes

The rate of brightness deterioration in the laser light source is extremely slow compared to lamp-based projectors. Built-in brightness and color sensors eliminate fluctuations in brightness and color to constantly maintain the optimal balance. Together with a durable optical system, the PT-RZ670 Series maintains excellent picture quality for a long period of time. In many cases, this means no maintenance until the next refresh cycle.

*¹ For 1-chip DLP™ projectors, as of July 2014.


*² A guideline for light source replacement. The maintenance-free period may be shortened due to environmental conditions.

*³ With DYNAMIC CONTRAST mode set to AUTO.




- **Normal/Eco Mode Enables Approx. 20,000 Hours*² of Continuous Operation**

In NORMAL mode with brightness of 6,500 lm, the PT-RZ670 Series projector requires no maintenance for approximately 20,000 hours.*² In ECO mode with brightness of 5,400 lm, the length would be approximately 24,000 hours.*² These modes are suitable for frequent but not continuous usage, such as education or signage applications.

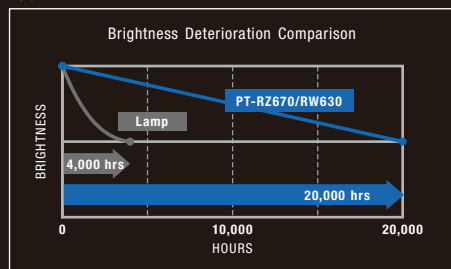

- **Constant Brightness Modes for Long-Term Applications for up to 10 Years*⁴**

Installation conditions for surveillance applications such as control rooms, simulations, and museum exhibits do not require the high brightness of 6,500 lm. Lowering the output of the laser light source extends its life span. With this feature in mind, the PT-RZ670 Series has been equipped with operating modes that lengthen the usage time and maintain a constant brightness. For instance, in LONG LIFE 3 mode, it boasts up to 87,600 hours*⁴ of continuous operation, i.e., about 10 years of 24/7 projection, while maintaining fixed brightness and picture quality.

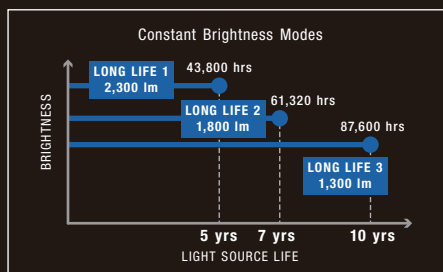

- **User Operating Mode**

In addition to the preset operating modes, the PT-RZ670 Series can be customized to match your application—with greater brightness or a longer life. You can set the brightness to range from 1,500 to 6,500 lm, or set the lifetime for a maximum of 10 years, whichever you choose.

- **Powerful Cooling System Maintains Stable Operation up to 45°C*⁵**

The PT-RZ670 Series employs newly developed cooling systems for the laser light source and DLP™ chip to suppress temperature rises inside the projector, allowing stable operation up to an ambient temperature of 45°C (113°F).*⁵ The use of these cooling systems also achieves quiet operation of 35 dB, enabling viewers to concentrate on the projected content.

- **Liquid Cooling System for Laser Light Source**

The liquid cooling system directly cools the laser light source modules. It also enables the high brightness of 6,500 lm even in an ambient temperature of up to 45°C (113°F).*⁵ The system is

hermetically sealed, so you don't need to replenish the liquid.



- **Dust-Resistant Structure with an Airtight Optical Block**

The area between the laser light source to the DLP™ chip and prism is sealed to form an airtight structure for the optical block, the heart of the projector. This resists the effects of dust and other particles in the air, and enables use of the projector in a wide range of environments.

*⁴ With OPERATING MODE set to LONG LIFE 3, in which mode brightness is lowered to 1,500 lm. Replacement of other parts than the light source may be required in shorter period. 24 hours/day × 365 days/year × 10 years = 87,600 hours.

*⁵ When used in locations from 0 m to 4,200 m (0 ft to 13,780 ft) above sea level in NORMAL mode, and from 0 m to 2,700 m (0 ft to 8,858 ft) above sea level in other modes. If the ambient temperature exceeds 35°C (95°F) when used in locations from 0 m to 2,700 m (0 ft to 8,858 ft) above sea level, or if it exceeds 25°C (77°F) when used in locations from 0 m to 4,200 m (0 ft to 13,780 ft) above sea level, the light output may be reduced to protect the projector.

Expanding Installation Flexibility


Multi-Screen Support System Seamlessly Connects Multiple Screens

• Edge Blending

The edges of adjacent screens can be blended and their luminance controlled.

• Color Matching

This function corrects for slight variations in the color reproduction range of individual projectors. The PC software assures easy, accurate control.

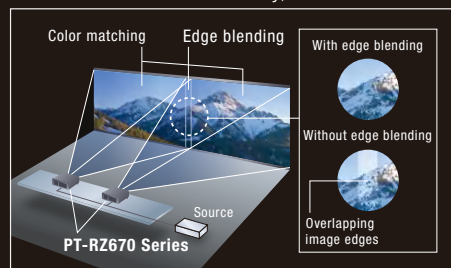

• Multi-Screen Processor

The PT-RZ670 Series can project large, multi-screen images without any additional equipment. Up to 100 (10 × 10) units can be edge-blended at a time.

Multi-Unit Brightness/Color Control

By using built-in brightness and color sensors, this function automatically corrects the brightness and color fluctuations that occur over time in the individual projectors of a multi-screen system. Up to eight projectors can be controlled by connecting to each other via a hub, and this can be increased to a maximum of 2,048 projectors by using "Multi Projector Monitoring & Control Software Ver. 2.8."

360-Degree Projection Capability


With the PT-RZ670 Series, projection is possible in any direction vertically and horizontally, and the unit can be rotated 360 degrees for installation at any angle.



Geometric Adjustment for Specially Shaped Screens (PT-RZ670)

This function adjusts the image for projection onto spherical, cylindrical and other specially

shaped screens. You can make the adjustment easily using only the remote control, with no external equipment needed.

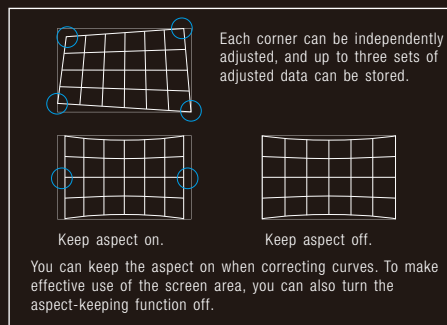


Geometry Manager Pro Freeware (PT-RZ670)

The Geometry Manager Pro software offers a more flexible and complex geometric adjustment capability, and supports color matching and edge blending for multi-screen projection. It also makes adjustments for multiple projectors fast and easy over a network.

Optional ET-UK20 Upgrade Kit Featuring Geometry Manager Pro (PT-RZ670)


This plug-in software for Geometry Manager Pro enables creative masking using four lines and/or bitmap data, uniformity correction, and other useful functions.

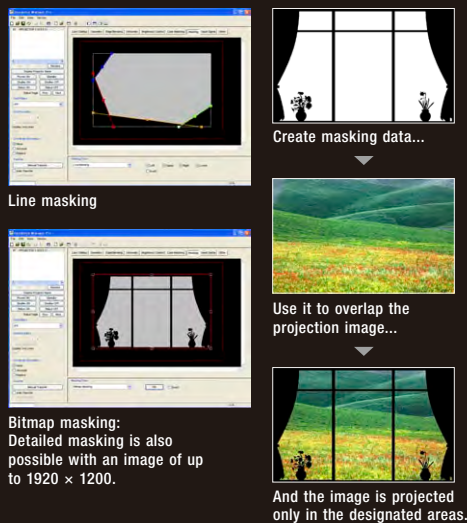

Optional ET-CUK10*6 Auto Screen Adjustment Upgrade Kit (PT-RZ670)

This plug-in software for Geometry Manager Pro sets up multiple projectors automatically and simultaneously, greatly saving installation time and costs. It takes only three quick and simple steps. By using a camera*7 together with a PC connected to the projectors via a network, this

software calibrates and adjusts multi-screen or curved-screen projection. Adjustments include geometric adjustment, edge blending, color matching, stacking, brightness, and black level.

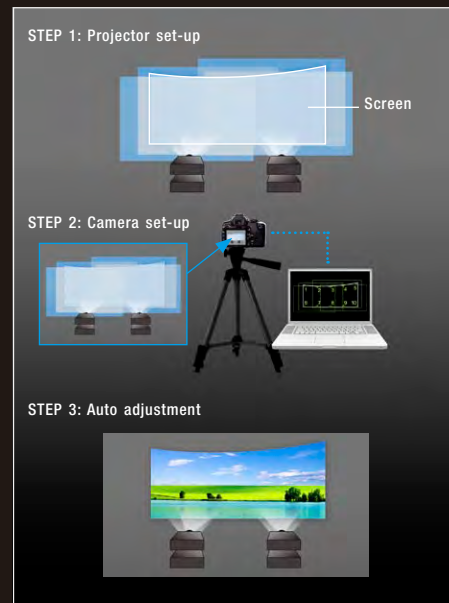

A Wide Selection of Optional Lenses Including ET-DLE030 Ultra-Short-Throw Lens

A wide variety of lenses add versatility and flexibility to projector installation. Long-throw zoom lenses, a short-throw lens, and an ultra-short-throw lens, in particular, make it easier to adapt your projector to the installation site compared with other brand systems. The ET-DLE030 ultra-short-throw lens enables 100-inch projection from a 0.8 m (2.7 ft) distance. It's a powerful solution for the hassles of installation in a narrow space. The lenses attach and detach with one-touch ease.



NOTE: The usage example shown above is simulated images. In actual installation, a predetermined amount of space must be provided around the projector.

*6 Available for use worldwide except in the United States. Updates of projector firmware and Geometry Manager Pro software are required.

*7 Supported cameras are Nikon D5200/D5300 or successor models.

Professional System Integration

DIGITAL LINK—The Single Cable Solution


- Transmits Digital Signals up to 100 m (328 ft) with a Single Cable



Equipped with a DIGITAL LINK terminal, the PT-RZ670 Series projector allows transmission of HDMI, uncompressed HD digital video, and control signals (Ethernet, RS-232C) for up to 100 meters (328 feet) through a single CAT5e (STP) cable or higher. This simplifies cabling and system upgrades, making it ideal for ceiling-mount and other permanent installations.

- **Optional ET-YFB100G Digital Interface Box for Easy Setup**

Used together with the ET-YFB100G Digital Interface Box, or other compatible equipment,*⁸ the installation of this projector is easier than ever, without any need for external receivers. The input signal can also be easily switched*⁹ from control panel or remote control of the projector to enable attractive presentations or lessons using multimedia content.

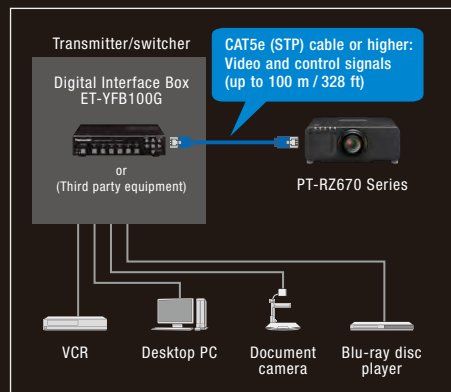

For details on other manufacturers' equipment, visit our Projector Global Web Site:
panasonic.net/avc/projector

Art-Net*¹⁰ Compatible

The PT-RZ670 Series projector is compatible with the Art-Net protocol for lighting management. Art-Net compatibility lets you connect the projector to the lighting console, and operate functions such as shutter on/off, input change, power on/off, etc., together with the light control.

Multiple Terminals with HD-SDI Compatibility

The PT-RZ670 Series has an array of terminals, including 3D sync, DVI-D and HDMI terminals. The PT-RZ670 also features an SDI (3G-, HD-, and SD-SDI) input terminal.

Multi Projector Monitoring & Control Software Ver. 3.1

Panasonic's original Multi Projector Monitoring & Control Software Ver. 3.1 freeware lets you control and monitor multiple projectors at the same time over a wired LAN. If a problem occurs, an alarm message is sent to the monitoring/controlling PC.

Web Browser Control

The PT-RZ670 Series can be easily operated remotely over a LAN network, because it is all done using the computer's web browser. Furthermore, the projector sends an e-mail message to notify the operator when an error has occurred.

Optional ET-SWA100 Early Warning Software

This original software monitors projectors and displays that are connected to an intranet and informs you when an abnormality is detected or predicted,*¹¹ and when there are symptoms of trouble. This minimizes downtime to provide more stable operation, saving time and reducing costs for maintenance and service.



Other Valuable Features

- System Daylight View 2 enhances color perception with no need to turn off the lights.
- DICOM Simulation mode reproduces easy-to-view rendering of X-ray photos.*¹²
- Rec. 709 mode for HDTV projection to provide accurate colors.

- Waveform Monitor for easy and precise calibration.
- Lens-centered design and a wide horizontal/vertical lens shift.
- Shutter effect with fade in/out (processing time controllable between 0 and 10 seconds).
- PJLink™ compatible.
- P-in-P function.*¹³
- Image rotation function
- On-screen menu can be rotated in portrait mode.
- Scheduling function.
- 30 m (98 ft) long-range wireless remote control.
- Anti-theft features with chain opening.
- Control device setup function.
- ID assignment for up to 64 units.
- Built-in test pattern.
- Selectable 10-language on-screen menu (English, German, French, Spanish, Italian, Portuguese, Russian, Japanese, Chinese, Korean).
- RoHS Directive compliant.

Ecology-Conscious Design

- Lamp-free (no mercury)
- Low heat dissipation
- RoHS Directive compliant
- No halogenated flame retardants are used in the cabinet.
- Lead-free glass is used for the lens.
- Light source mode is selectable to reduce power consumption.
- Standby power consumption of only 0.3 W has been achieved. (STANDBY MODE: ECO)
- An Auto Off Timer switches the projector to standby mode when no input signal is received for a preset time.



All PT-RZ670 Series projectors are carefully manufactured at the Panasonic factory in Japan, under strict quality control. This is another, very important advantage of a Panasonic projector.



*⁸ Crestron's DigitalMedia 8G+™, Extron's XTP Systems and AMX's Enova DVX.

*⁹ Input selection and other ET-YFB100G operations can be performed only when connecting to a DIGITAL LINK compatible projector.


*¹⁰ Art-Net is a protocol for transmitting the lighting control protocol DMX512 over Ethernet.

*¹¹ Please note that this software does not guarantee the prediction of all device breakdowns in all instances.

*¹² The PT-RZ670 Series projector is not a medical instrument. Do not use it for actual medical diagnosis.

*¹³ This function cannot be used with some input signals and selected inputs.

Terminals

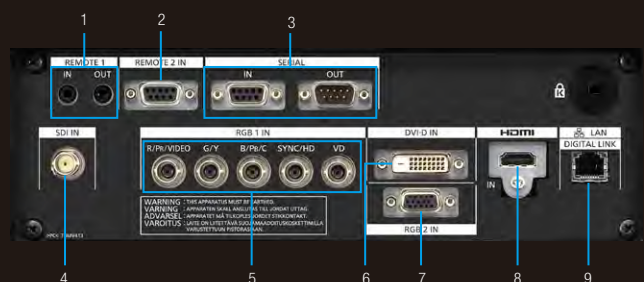

- 1 Remote 1 input/output
- 2 Remote 2 input
- 3 Serial input/output
- 4 SDI input (PT-RZ670 only)
- 5 RGB 1 input
- 6 DVI-D input
- 7 RGB 2 input
- 8 HDMI input
- 9 LAN / DIGITAL LINK connector

Black/white models

The cabinet for each model is available in black or white.

PT-RZ670B/RW630B



PT-RZ670W/RW630W



PT-RZ670LB/RW630LB



PT-RZ670LW/RW630LW



Optional accessories

ET-DLE030
Fixed-focus lens



ET-DLE250
Zoom lens



ET-DLE350
Zoom lens



ET-DLE085
Zoom lens



ET-DLE450
Zoom lens



ET-DLE150
Zoom lens



ET-DLE055
Fixed-focus lens




ET-PKD120H
High-ceiling mount bracket



ET-PKD120S
Low-ceiling mount bracket



ET-PKD130B
Attachment for ceiling
mount bracket



ET-PKD130H
High-ceiling mount bracket
with 6-axis adjustment
mechanism



NOTE:
Recommended
when used with
the ET-DLE030.


ET-UK20
Geometry Manager Pro Upgrade Kit



ET-CUK10
Auto Screen Adjustment upgrade kit

NOTE: Available for use worldwide except in the United States.

ET-SWA100
Early Warning Software



ET-YFB100G
Digital interface box



Brackets included for various installation needs, including server rack (EIA standards) mounting.

Featuring the superb color rendition, light weight, and excellent TCO, the PT-RZ670 Series meets the versatile needs of professionals.



Control rooms



Museums/entertainment



Higher education



Staging

Model		PT-RZ670/RZ670L	PT-RW630/RW630L
Power supply		120–240 V AC, 8.5 A, 50/60 Hz	
Power consumption		720 W (735 VA at 120 V AC)(0.3 W*1 when STANDBY MODE set to ECO,*2 3 W*1 when STANDBY MODE set to NORMAL)	
DLP™ chip	Panel size Display method Pixels	17.0 mm (0.67 inches) diagonal (16:10 aspect ratio) DLP™ chip × 1, DLP™ projection system 2,304,000 (1,920 × 1,200) pixels	16.5 mm (0.65 inches) diagonal (16:10 aspect ratio) DLP™ chip × 1, DLP™ projection system 1,024,000 (1,280 × 800) pixels
Lens	PT-RZ670/RW630	Powered zoom (throw ratio 1.7–2.4:1), powered focus F 1.7–1.9, f 25.6–35.7 mm	Powered zoom (throw ratio 1.8–2.5:1), powered focus F 1.7–1.9, f 25.6–35.7 mm
	PT-RZ670L/RW630L	Optional powered zoom/focus lenses and fixed-focus lens	
Light source		Laser diodes	
Screen size (diagonal)		1.27–15.24 m (50–600 in), 1.27–5.08 m (50–200 in) with the ET-DLE055, 2.54–8.89 m (100–350 in) with the ET-DLE030, 16:10 aspect ratio	
Brightness*3		6,500 lm (OPERATING MODE: NORMAL)	
Center-to-corner uniformity*3		90 %	
Contrast*3		10,000:1 (full on/full off, with DYNAMIC CONTRAST on)	
Resolution		1,920 × 1,200 pixels	1,280 × 800 pixels*4
Scanning frequency	SDI 3G-SDI	SMPTE ST 424 compliant, [RGB 4:4:4 12-bit/10-bit] 1080(1125)/60i, 1080(1125)/50i, 1080(1125)/25p, 1080(1125)/24p, 1080(1125)/24sF, 1080(1125)/30p, [YPaPr 4:2:2 10-bit] 1080(1125)/60p, 1080(1125)/50p	–
	HD-SDI	SMPTE ST 292 compliant, [YPaPr 4:2:2 10-bit] 720(750)/60p, 720(750)/50p, 1035(1125)/60i, 1080(1125)/60i, 1080(1125)/50i, 1080(1125)/25p, 1080(1125)/24p, 1080(1125)/24sF, 1080(1125)/30p	
	SD-SDI	SMPTE ST 259 compliant, [YCaCr 4:2:2 10-bit] 480i(525i), 576i(625i)	
	HDMI/DVI-D/DIGITAL LINK	Compatible with HDCP, 480i(525i)*5 576i(625i)*5 480p(525p), 576p(625p), 720(750)/60p, 720(750)/50p, 1080(1125)/60i, 1080(1125)/50i, 1080(1125)/25p, 1080(1125)/24p, 1080(1125)/24sF, 1080(1125)/30p, 1080(1125)/60p, 1080(1125)/50p VGA (640 × 480)–WUXGA*6 (1,920 × 1,200)(compatible with non-interlaced signals only), dot clock: 25–162 MHz	
	RGB YPaPr (YCaCr)	fr: 15–100 kHz, fv: 24–120 Hz, dot clock: 25–162 MHz fr: 15.75 kHz, fv: 60 Hz [480i (525i)] fr: 37.50 kHz, fv: 50 Hz [720 (750)/50p] fr: 27.00 kHz, fv: 24 Hz [1080 (1125)/24p] fr: 31.50 kHz, fv: 60 Hz [480p (525p)] fr: 33.75 kHz, fv: 60 Hz [1035 (1125)/60i] fr: 27.00 kHz, fv: 48 Hz [1080 (1125)/24sF] fr: 15.63 kHz, fv: 50 Hz [576i (625i)] fr: 33.75 kHz, fv: 60 Hz [1080 (1125)/60i] fr: 33.75 kHz, fv: 30 Hz [1080 (1125)/30p] fr: 31.25 kHz, fv: 50 Hz [576p (625p)] fr: 28.13 kHz, fv: 50 Hz [1080 (1125)/50i] fr: 67.50 kHz, fv: 60 Hz [1080 (1125)/60p] fr: 45.00 kHz, fv: 60 Hz [720 (750)/60p] fr: 28.13 kHz, fv: 25 Hz [1080 (1125)/25p] fr: 56.25 kHz, fv: 50 Hz [1080 (1125)/50p] fr: 15.75 kHz, fv: 60 Hz [NTSC/NTSC4.43/PAL-M/PAL60], fr: 15.63 kHz, fv: 50 Hz [PAL/PAL-N/SECAM]	
	Video/YC		
Optical axis shift*7		Vertical +50%, -16%; horizontal +30%, -10%; powered	
Keystone correction range		Vertical ±40°*8 horizontal ±15°*9	Vertical ±40°*9/10
Keystone correction range with the optional upgrade kit ET-UK20		Vertical ±45°*11/12 horizontal ±40°*12/13	–
Installation		Ceiling/floor, front/rear	
Terminals	SDI IN	BNC × 1 (3G/HD/SD-SDI)	–
	HDMI IN DVI-D IN RGB 1 IN RGB 2 IN SERIAL IN SERIAL OUT REMOTE 1 IN REMOTE 1 OUT REMOTE 2 IN LAN / DIGITAL LINK	HDMI 19-pin × 1 (Deep Color, compatible with HDCP) DVI-D 24-pin × 1 (DVI 1.0 compliant, compatible with HDCP, compatible with single link only) BNC × 5 (RGB/YPaPr/YCaCr/YC × 1) D-Sub HD 15-pin (female) × 1 (RGB/YPaPr/YCaCr × 1) D-sub 9-pin (female) × 1 for external control (RS-232C compliant) D-sub 9-pin (male) × 1 for link control M3 × 1 for wired remote control M3 × 1 for link control (for wired remote control) D-sub 9-pin (female) × 1 for external control (parallel) RJ-45 × 1 (for network and DIGITAL LINK (video/network/serial control) connection, 100Base-TX, compatible with Art-Net, compliant with PJLink™, Deep Color, compatible with HDCP)	
Cabinet materials		Molded plastic	
Dimensions (W × H × D)	PT-RZ670/RW630 PT-RZ670L/RW630L	498 × 200*14 × 581 mm (19-19/32 × 7-7/8*14 × 22-7/8 in)(with supplied lens) 498 × 200*14 × 538 mm (19-19/32 × 7-7/8*14 × 21-3/16 in) (without lens)	
Weight*15	PT-RZ670/RW630 PT-RZ670L/RW630L	Approximately 23.2 kg (51.1 lbs) (with supplied lens) Approximately 22.5 kg (49.6 lbs) (without lens)	
Operation noise*3		35 dB	
Operating environment		Operating temperature: 0–45 °C (32–113 °F)*14 operating humidity: 10%–80% (no condensation)	
Supplied accessories		Power cord with secure lock, wireless/wired remote control unit, batteries (R03/AAA type × 2), software CD-ROM (Logo Transfer Software, Multi Projector Monitoring & Control Software)	

- Dimensions** unit: mm (inches)

498
(19-19/32)

200
(7-7/8)

581
(22-7/8)

1. Do not install the projector in locations that are subject to excessive water, humidity, steam, or oily smoke. Doing so may result in fire, malfunction, or electric shock.
2. Please observe the following precautions:
 - Never place objects on top of the projector while it is in operation.
 - Make sure there is an unobstructed space of 500 mm (1 ft 8 in) or more around the projector's exhaust openings.
 - Do not stack projector units directly on top of one another for the purpose of multiple (stacked) projection. When stacking projector units, be sure to provide the amount of space indicated below between them. These space requirements also apply to installations where only one projector unit is operating at one time and the other unit is used as a backup.
 - Make sure that nothing blocks the projector's air intake and exhaust openings. Also, install the projector so that cool or hot air from other air conditioning equipment does not flow directly toward the projector's air intake or exhaust openings.
 - Do not install the projector in an enclosed space. If it is necessary to install it in an enclosed space, add a separate ventilation system. If ventilation is insufficient, hot air will accumulate at the intake opening. This may cause the projector's protective circuit to interrupt projector operation.
 - If the projector is placed in a box or enclosure, ensure the projector's intake and exhaust openings are not blocked. Take particular care to ensure that hot air from the exhaust openings is not sucked into the intake.
3. Because the ET-DLE055/DLE030 is a fixed short-throw lens, the lens shift function cannot be used with it.

The SOLID SHINE Series features a cutting-edge solid-state light source



SOLID SHINE Series projectors provide solid reliability and long-lasting brightness unprecedented by conventional lamp-based projectors.

Approximately up to 10 years* of maintenance-free operation

No need to replace the light source or air filter, providing a dramatic reduction in the Total Cost of Ownership (TCO).

* In LONG LIFE 3 mode. A guideline for light source replacement. The maintenance-free period may be shortened due to environmental conditions.

Long-lasting picture quality

Excellent picture quality and brightness are maintained for a long time.

Superb color reproduction

Beautiful, vivid colors exceeding the levels of conventional projectors.

Projection Distance

PT-RZ670 (16:10 aspect ratio)

unit: meters (feet)

Diagonal image size [throw ratio]	Throw distance													
	ET-DLE085		ET-DLE150		Supplied lens [1.7-2.4:1]		ET-DLE250		ET-DLE350		ET-DLE450		ET-DLE055	
	[0.8-1.0:1]		[1.3-1.9:1]		[1.7-2.4:1]		[2.3-3.6:1]		[3.6-5.4:1]		[5.4-8.6:1]		[0.8:1]	
	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.
1.27 [50"]	0.82 (2.7)	1.04 (3.4)	1.38 (4.5)	2.01 (6.6)	1.82 (6.0)	2.57 (8.4)	2.42 (7.9)	3.87 (12.7)	3.80 (12.5)	5.82 (19.1)	5.66 (18.6)	9.12 (29.9)	0.83 (2.7)	
2.03 [80"]	1.35 (4.4)	1.68 (5.5)	2.23 (7.3)	3.25 (10.7)	2.95 (9.7)	4.16 (13.6)	3.92 (12.8)	6.23 (20.4)	6.16 (20.2)	9.38 (30.8)	9.23 (30.3)	14.78 (48.5)	1.35 (4.4)	
2.54 [100"]	1.70 (5.6)	2.11 (6.9)	2.81 (9.2)	4.08 (13.4)	3.71 (12.2)	5.21 (17.1)	4.92 (16.1)	7.81 (25.6)	7.74 (25.4)	11.76 (38.6)	11.62 (38.1)	18.55 (60.8)	1.70 (5.6)	
3.81 [150"]	2.57 (8.4)	3.19 (10.5)	4.24 (13.9)	6.14 (20.1)	5.60 (18.4)	7.86 (25.8)	7.41 (24.3)	11.75 (38.6)	11.68 (38.3)	17.71 (58.1)	17.58 (57.7)	27.97 (91.8)	2.58 (8.5)	
5.08 [200"]	3.44 (11.3)	4.27 (14.0)	5.67 (18.6)	8.20 (26.9)	7.50 (24.6)	10.50 (34.5)	9.91 (32.5)	15.70 (51.5)	15.61 (51.2)	23.66 (77.6)	23.54 (77.2)	37.39 (122.7)	3.45 (11.3)	
7.62 [300"]	5.18 (17.0)	6.43 (21.1)	8.53 (28.0)	12.33 (40.4)	11.28 (37.0)	15.79 (51.8)	14.91 (48.9)	23.59 (77.4)	23.49 (77.1)	35.56 (116.7)	35.46 (116.3)	56.24 (184.5)	— (—)	
10.16 [400"]	6.93 (22.7)	8.59 (28.2)	11.39 (37.4)	16.45 (54.0)	15.07 (49.4)	21.07 (69.1)	19.90 (65.3)	31.48 (103.3)	31.36 (102.9)	47.46 (155.7)	47.38 (155.4)	75.08 (246.3)	— (—)	
12.70 [500"]	8.67 (28.5)	10.75 (35.3)	14.25 (46.7)	20.58 (67.5)	18.86 (61.9)	26.36 (86.5)	24.90 (81.7)	39.37 (129.2)	39.23 (128.7)	59.36 (194.7)	59.30 (194.6)	93.93 (308.2)	— (—)	
15.24 [600"]	10.42 (34.2)	12.91 (42.3)	17.11 (56.1)	24.70 (81.0)	22.64 (74.3)	31.65 (103.8)	29.89 (98.1)	47.25 (155.0)	47.11 (154.6)	71.25 (233.8)	71.22 (233.7)	112.77 (370.0)	— (—)	

PT-RZ670 with ET-DLE030
(16:10 aspect ratio)


unit: meters (feet)

Diagonal image size	L1		L2	L3	L4	A1	A2
	Throw ratio	Throw ratio					
2.54 [100"]	0.82 (2.7)	0.84 (2.8)	0.65 (2.1)	0.12 (0.4)	0.43 (1.4)	0.63 (2.1)	
3.81 [150"]	1.23 (4.0)	1.25 (4.1)	1.06 (3.5)	0.52 (1.7)	0.68 (2.2)	0.88 (2.9)	
5.08 [200"]	1.63 (5.4)	1.66 (5.4)	1.47 (4.8)	0.93 (3.0)	0.93 (3.1)	1.13 (3.7)	
7.62 [300"]	2.45 (8.0)	2.47 (8.1)	2.28 (7.5)	1.74 (5.7)	1.43 (4.7)	1.63 (5.4)	
8.89 [350"]	2.85 (9.4)	2.88 (9.4)	2.69 (8.8)	2.15 (7.1)	1.69 (5.5)	1.89 (6.2)	

PT-RW630 with ET-DLE030
(16:10 aspect ratio)

unit: meters (feet)

Diagonal image size	L1		L2	L3	L4	A1	A2
	Throw ratio	Throw ratio					
2.54 [100"]	0.86 (2.8)	0.88 (2.9)	0.69 (2.3)	0.16 (0.5)	0.59 (1.9)	0.79 (2.6)	
3.81 [150"]	1.29 (4.2)	1.31 (4.3)	1.12 (3.7)	0.58 (1.9)	0.92 (3.0)	1.12 (3.7)	
5.08 [200"]	1.71 (5.6)	1.74 (5.7)	1.55 (5.1)	1.01 (3.3)	1.25 (4.1)	1.45 (4.7)	
7.62 [300"]	2.57 (8.4)	2.59 (8.5)	2.40 (7.9)	1.87 (6.1)	1.91 (6.3)	2.11 (6.9)	
8.89 [350"]	3.00 (9.8)	3.02 (9.9)	2.83 (9.3)	2.29 (7.5)	2.24 (7.3)	2.44 (8.0)	



- L1: Distance from the mirror surface to the screen.
- L2: Distance from the tip of lens to the screen.
- L3: Distance from the projector front to the screen.
- L4: Distance from the projector rear to the screen.
- A1: Height from the edge of the screen to the top of the projector.
- A2: Height from the edge of the screen to the bottom of the projector.

NOTE: L4 is not the distance from the projector's rear panel to a wall, but the distance from the projector's rear panel to the screen. Provide an exhaust cooling space of 500 mm (1 foot 8 inches) or more between the rear panel of the projector and a wall or other obstruction. If installing it in an enclosed space, add a separate air conditioning or ventilation system. If ventilation is insufficient, exhaust heat may accumulate and trip the projector's protective circuit.

Panasonic®

For more information about Panasonic projectors, please visit:
 Projector Global Web Site – panasonic.net/avc/projector
 Facebook – www.facebook.com/panasonicprojector
 YouTube – www.youtube.com/user/PanasonicProjector

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability differs depending on region and country. This product may be subject to export control regulations. DLP, DLP logo and DLP Medallion logo are trademarks or registered trademarks of Texas Instruments. The projection distances and throw ratios given in this leaflet are for use only as guidelines. For more detailed information, please consult the dealer from whom you are purchasing the product. The PJLink trademark is an application trademark in Japan, the United States, and other countries and regions or registered trademarks. RoomView, Crestron RoomView, and Crestron Connected are trademarks of Crestron Electronics, Inc. HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. All other trademarks are the property of their respective trademark owners. Projection images simulated.
 © 2014 Panasonic Corporation. All rights reserved.



Factories of Visual System Division have received ISO 14001:2004—the Environmental Management System certification (except for third parties' peripherals).

All information included here is valid as of August 2014.

PT-RZ670G2 Printed in Japan.