


QuickLock tripod adapter and bridge plates.



QuickLock, for many cameras – the solid connection to the tripod.

Adaption for Sony PMW-F3
401-125-11

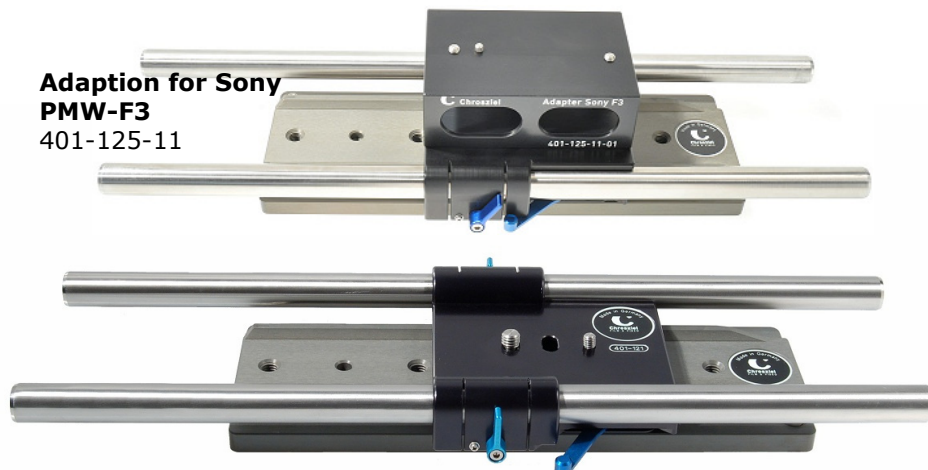

For all bridge plates: The various offsets of the optical axes can be compensated for by using the slotted holes. (e.g. Sony left; Thomson centre; Panasonic right).

The patented QuickLock tripod adapter plate: for quick and easy, play-free camera connection

Suitable for all cameras which are equipped with wedge plate connections (V-mount) in the front and a mounting bracket behind the shoulder support.

The Chrosziel QuickLock plate clamps the camera automatically and easily, and even after decades of use, still works perfectly thanks to its patented mechanics: pressure on the wedge plate and traction on the camera's mounting bracket. It protects against unintentional opening, but the camera can still be quickly and easily removed in a flowing movement. On the bottom, two slot nuts with a 1/4 and 3/8 inch thread slide over a large area to fix onto a tripod or the bridge plates.

In combination with the **bridge plates**, adjustment to the centre of gravity on the tripod is very easy. The plates come with 19 mm stainless steel rods (video standard). All accessories for the 15mm light-weight supports fit by means of an adaptor. For video cameras with different optical axes, bridge plates are specially adapted.


For the use of film accessories on video cameras, a special version adjusts optical axes. This version is based on 15mm stainless steel rods.

Components:	Article no.
QuickLock tripod adapter plate	401-130
Bridge plate 19mm Video-Standard (rod Ø 19 mm, rod centre to centre spacing 105 mm)	401-121
Bridge plate 19mm Video-Standard for Sony HDC 1500	401-123
Bridge plate 19mm Video-Standard for Sony F23 / 35	401-F235
Bridge plate 19mm Video-Standard for Sony PMW-F3	401-125-11
Bridge plate 19mm for RED One	401-124
Bridge plate 19mm Video-Standard for SI-2K	401-SI2K
Universal Accessory Mount for Sony F23 / 35	401-F234

Bridge Plates / Adaptors



Bridge plate 401-F235 for Sony F23 / F35 / F65.



Bridge plate 401-124 for RED One.



Bridge plate 401-SI2K
for Silicon Imaging SI-2K.

**Bridge plate
Adaptor F3
401-125-11-01**
connects Sony
PMW-F3 to Bridge
Plate 401-125



Mini wedge plate 401-140 connects the
DV light-weight supports of the 401-400
series with the QuickLock tripod plate.



Adaptor 401-10Q quick connector for
19mm rods with centred mounts to 15mm
video standard.

**Universal Accessory
Mount 401-F234** for
Sony F23 / F35, holds
the control panel and
the studio viewfinder
HDVF C750.




Adaptor 401-10 for 19mm rods
with centred mounts to 15mm rods



Adaptor 401-12 for 15mm rods with
film spacing (401-122) to 15mm video
standard.

**Accessory Clamps:
3310 for 15 mm rods
3320 for 19 mm rods**
adding two 1/4" or 3/8"
treads to the rod.

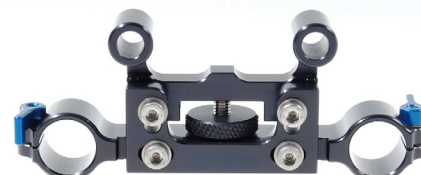

Adaptor 401-17 for 19mm rods with
horizontally and vertically adjustable
mounts for 15mm rods



Adaptor 401-18 for 15mm rods with
film spacing (401-122), horizontally and
vertically adjustable mounts for 15mm
video standard.